

## Introduction

This Technical Appendix supplements Chapter 6: Air Quality and describes the additional details for the construction dust assessment, construction traffic assessment and dispersion modelling of point source emissions from the operational Proposed Development, as summarised in the main chapter.

## Construction Phase – Criteria for Construction Dust Assessment

The following three potential activities have been screened as potentially not insignificant, based on the nature of construction activities proposed:

- Earthworks (soil stripping, spoil movement and stockpiling;
- Construction (including on-site concrete batching); and
- Trackout (HGV movements on unpaved roads and offsite mud on the highway).

### Magnitude Definitions

The potential magnitude of effects for the potential dust emissions is categorised as detailed in Table 6A.1 below.

**Table 6A.1: Definition of Magnitude of Construction Activities**

Magnitude	Earthworks	Construction	Trackout
Large	Site area >1ha, potentially dusty soil type (e.g. clay), >10 heavy earth moving vehicles at once, bunds >8m high, total material moved >100,000t	Total building volume >100,000m <sup>3</sup> , on-site concrete batching, sandblasting	>50 HDV (>3.5t) peak outward movements per day, potentially dusty surface material (e.g. high clay content), unpaved road length >100m
Medium	Site area 0.25- 1ha, moderately dusty soil type (e.g. silt), 5-10 heavy earth moving vehicles at once, bunds 4-8m high, total material moved 20,000-100,000t	Total building volume 25,000- 100,000m <sup>3</sup> , potentially dusty materials e.g. concrete, on-site concrete batching	10-50 HDV (>3.5t) peak outward movements per day, moderately dusty surface material (e.g. high clay content), unpaved road length 50-100m
Small	Site area <0.25ha, large grain soil type (e.g. sand), <5 heavy earth moving vehicles at once, bunds <4m high, total material moved <20,000t	Total building volume <25,000m <sup>3</sup> , low dust potential construction materials e.g. metal/ timber	<10 HDV (>3.5t) peak outward movements per day, surface material low dust potential, unpaved road length <50m

### Receptor Sensitivity Definitions

The assessment of construction dust has been made with respect to the receptor and area sensitivity definitions as outlined in Tables 6A.2-4 below.

**Table 6A.2: Receptor Sensitivity to Construction Dust Effects**

Potential Dust Effect	Human Perception of Dust Soiling Effects	PM <sub>10</sub> Health Effects	Ecological Effects
High sensitivity	Enjoy a high level of amenity; appearance/ aesthetics/ value of property would be diminished by soiling; receptor expected to be present continuously/ regularly; e.g. residential/ museums/ car showrooms/ commercial horticulture	Public present for 8 hours per day or more, e.g. residential, schools, car homes	Ecological receptor within 50m of source, of national or international importance including SAC, or SSSI with dust sensitive feature(s)
Moderate sensitivity	Enjoy a reasonable level of amenity; appearance/ aesthetics/ value of property could be diminished by soiling; receptor not expected to be present continuously/ regularly; e.g. parks/ places of work	Only workforce present (no residential or high sensitivity receptors) 8 hours per day or more	Ecological receptor within 50m of source, of national or regional importance including SSSI or CWS with features with dust sensitive features
Low sensitivity	Enjoyment of amenity not reasonably expected; appearance/ aesthetics/ value of property not diminished by soiling; receptors are transient / present for limited period of time; e.g. playing fields, farmland, footpaths, short term car parks <sup>1</sup> and roads - *subject to typical usage, could be high sensitivity	Transient human exposure, e.g. footpaths, playing fields, parks	Ecological receptor within 50m of source, of local importance (e.g. LNR) with dust sensitive features

**Table 6A.3: Sensitivity of the Area to Dust Soiling Effects on People and Property**

Receptor Sensitivity	Number of Receptors	Distance from the Source (m)			
		<20	<50	<100	<350
High	>100	High	High	Medium	Low
	10 – 100	High	Medium	Low	Low
	1 - 10	Medium	Low	Low	Low
Medium	>1	Medium	Low	Low	Low
Low	>1	Low	Low	Low	Low

Distance measured from source to receptor; for trackout, receptor distance measured from roadside (up to 50m), up to 500m from Site exit.

**Table 6A.4: Sensitivity of the Area to Human Health Impacts**

Receptor Sensitivity	Number of Receptors	Distance from the Source (m)				
		<20	<50	<100	<200	<350
High (annual mean PM <sub>10</sub> concentration <24 µg/m <sup>3</sup> )	>100	Medium	Low	Low	Low	Low
	10 – 100	Low	Low	Low	Low	Low
	1 - 10	Low	Low	Low	Low	Low

Receptor Sensitivity	Number of Receptors	Distance from the Source (m)				
		<20	<50	<100	<200	<350
Medium (annual mean PM <sub>10</sub> concentration <24 µg/m <sup>3</sup> )	>100	Low	Low	Low	Low	Low
	10 – 100	Low	Low	Low	Low	Low
	1 - 10	Low	Low	Low	Low	Low
Low (annual mean PM <sub>10</sub> concentration <24 µg/m <sup>3</sup> )	>1	Low	Low	Low	Low	Low

Distance measured from source to receptor; for trackout, receptor distance measured from roadside (up to 50m), up to 500m from Site exit.

**Table 6A.5: Sensitivity of Area to Ecological Impacts**

Receptor Sensitivity	Distance to Source	
	<20m	<50m
High	High	Moderate
Moderate	Moderate	Low
Low	Low	Low

Distance measured from source to receptor; for trackout, receptor distance measured from roadside (up to 50m), up to 500m from Site exit.

### Risk Definitions

The potential risks from emissions from unmitigated construction activities have been defined with reference to the magnitude of the potential emission and the sensitivity of the highest receptor(s) within the effect area, as summarised in Table 6A.6 below.

**Table 6A.6: Classification of Risk of Unmitigated Impacts**

Area of Sensitivity to Activity	Magnitude		
	Large	Medium	Small
<b>Earthworks</b>			
High	High risk	Medium risk	Low risk
Medium	Medium risk	Medium risk	Low risk
Low	Low risk	Low risk	Negligible
<b>Construction</b>			
High	High risk	Medium risk	Low risk
Medium	Medium risk	Medium risk	Low risk
Low	Low risk	Low risk	Negligible
<b>Trackout</b>			
High	High risk	Medium risk	Low risk
Medium	Medium risk	Low risk	Negligible
Low	Low risk	Low risk	Negligible

## Assessment of Construction Dust

For the purpose of this assessment, the Proposed Development site is considered to be a large emissions source for fugitive dust emissions from construction related activities.

### Receptor Identification

**Table 6A.7: Identification of Receptors for Construction Dust Assessment**

ID	Receptor Name	Receptor Type	Approximate Distance from Site Boundary or Exit	Within Screening Distance?	Receptor Sensitivity to Dust and Particulates
R1	Hazel Dene	Residences	0.3km, E	Yes	High
R2	Church Lane, North Killingholme	Residences	1.6km, W	No	-
R3	Station House	Residences	0.9km, NE	No	-
R4	Old Vicarage, North Garth	Residences	2.2km, NW	No	-
R5	Manor Farm, North Killingholme	Residences	1.9km, NW	No	-
R6	Westfield Farm, North Killingholme	Residences	1.7km, W	No	-
R7	Staple Road, South Killingholme	Residences	1.5km, SW	No	-
R8	Humber Road, South Killingholme	Residences	1.3km, SW	No	-
R9	East End Farm	School	1.3km, SW	No	-
R10	Immingham	Residences	2km, S	No	-
R11	Station Road	Residences	1.3km, NE	No	-
R12	Fairfield House, North Garth	Residences	2.3km, NW	No	-
R13	The Poplars	Residences	2.7km, W	No	-
R14	Ulceby Road	Residences	2.5km, W	No	-
R15	Craven Lane	Residences	3.9km, W	No	-
R16	Town Street	Residences	1.9km, W	No	-
R17	Primitive Chapel Lane	Residences	1.9km, W	No	-
R18	Property north of Habrough	Residences	3.7km, SW	No	-
R19	Property on Station Road in Habrough	Residences	3.5km, SW	No	-
E1	Humber Estuary	SAC, SPA, Ramsar	1.3km, NE	No	-
E2	North Killingholme Haven	SSSI	1.8km, N	No	-

ID	Receptor Name	Receptor Type	Approximate Distance from Site Boundary or Exit	Within Screening Distance?	Receptor Sensitivity to Dust and Particulates
	Pits				
E3	Kirmington Pits	SSSI	8.3km, SW	No	-
E4	Kelsey Hill Gravel Pits	SSSI	11km, NE	No	-
E5	Swallow Wold	SSSI	12.3km, S	No	-
E6	Wrawby Moor	SSSI	14.6km, SW	No	-
E7	Eastfield Railway	LWS	1km, W	No	-
E8	Burkinshaws Covert	LWS	340m, N	Yes	Low
E9	Station Road Fields	LWS	340m, N	Yes	Low
E10	Rosper Road Pools	LWS	250m, SE	Yes	Low
E11	Chase Hill Wood	LWS	1.6km, NW	No	-
E12	Mayflower Wood Meadow	LWS	1.1km, SW	No	-
E13	Homestead Park Pond	LWS/ SINC	1.7km, SE	No	-
E14	Eastfield Road Pit	LWS	1km, W	No	-

### Area Sensitivity Assessment

The receptor sensitivity to the effects of dust soiling and PM<sub>10</sub> (human health) impacts has been determined for all activities, based on the closest distance from the identified receptors to those activities, as summarised in Table 6A.8 below. The overall area sensitivity to dust soiling, PM<sub>10</sub> (human health) impacts and ecological impacts is considered to be 'low'.

**Table 6A.8: Area Sensitivity for Receptors of Construction Dust**

Activity	Potential Impact	Receptor sensitivity and distance to activity	Area sensitivity
Earthworks	Dust soiling	High sensitivity <350m	Low
	Health PM <sub>10</sub>	High sensitivity (1-10 receptors) <350m	Low
	Ecological	Low sensitivity <350m	Low
Construction	Dust soiling	High sensitivity <350m	Low
	Health PM <sub>10</sub>	High sensitivity (1-10 receptors) <350m	Low
	Ecological	Low sensitivity <350m	Low
Trackout	Dust soiling	High sensitivity <350m	Low
	Health PM <sub>10</sub>	High sensitivity (1-10 receptors) <50m	Low
	Ecological	Low sensitivity <350m	Low

The risk of impacts from unmitigated activities has been determined through combination of the potential dust emission magnitude and the sensitivity of the area, for each activity to

determine the level of mitigation that should be applied. The risk of impacts from unmitigated activities are summarised in Table 6A.9 below.

**Table 6A.9: Risk of Impacts from Unmitigated Activities**

Activity	Earthworks	Construction	Trackout
Dust Emission Magnitude	Large	Large	Large
Risk of impacts form unmitigated activities			
Dust soiling (low sensitivity)	Low Risk	Low Risk	Low Risk
Health PM <sub>10</sub> (low sensitivity)	Low Risk	Low Risk	Low Risk
Ecological (low sensitivity)	Low Risk	Low Risk	Low Risk

The risk assessment for construction dust indicates that there would be a low risk of dust soiling impacts, human health impacts (PM<sub>10</sub>) and ecological impacts from unmitigated earthworks, construction and trackout activities. Medium risk of dust impacts on human health (PM<sub>10</sub>) from unmitigated earthworks, construction and trackout activities. These risk classifications are solely used to select the appropriate schedule of mitigation measures from IAQM guidance.

Mitigation measures to be embedded within the scheme will therefore be defined according to the low risk category for these activities, according to the indicative measures listed in Section 6.2 of the IAQM guidance.

## Road Traffic Emissions

### *Dispersion Model Parameters*

#### Bias Adjustment of Road Contribution of Oxides of Nitrogen, Particulate Matter and Fine Particulate Matter

In the absence of published local monitoring or measurement data within the air quality study area suitable for model bias adjustment, it has not been possible to adjust for model bias using real monitored data for NO<sub>x</sub> or particulates. Instead, the pollutant concentrations reported in this assessment have been adjusted using a bias adjustment factor of 3.0 applied to road contributions of NO<sub>x</sub> and particulates. The scale of factoring is based on our professional experience of undertaking air quality assessments across the UK, and which we believe provide a reasonable and robust approach for this assessment.

In the absence of suitably located sampled measurement data for the primary pollutants PM<sub>10</sub> and PM<sub>2.5</sub>, the same approach to bias adjustment has been applied to the modelled road PM<sub>10</sub> and PM<sub>2.5</sub> contributions as to the primary road NO<sub>x</sub> contribution, as recommended in LAQM.TG(16).

#### Oxides of Nitrogen to Nitrogen Dioxide Conversion

To accompany the publication of the guidance document LAQM TG(16), an oxides of nitrogen to nitrogen dioxide converter was made available by Defra as a tool to calculate the road nitrogen dioxide contribution from modelled road oxides of nitrogen contributions (Version 6.1). The tool comes in the form of an MS Excel spreadsheet and uses borough specific data to calculate annual mean concentrations of nitrogen dioxide from dispersion model output values of annual mean concentrations of oxides of nitrogen. This tool was

used to calculate the total nitrogen dioxide concentrations at receptors from the modelled road oxides of nitrogen contribution and associated background concentration. Due to the location of the Proposed Development, Wakefield Metropolitan District Council and Selby District Council have been specified as the local authority and the 'All other UK traffic' mix selected.

#### Predicting the Number of Days in which the Particulate Matter 24-hour Mean Objective is Exceeded

The guidance document LAQM.TG(03) sets out the method by which the number of days in which the particulate matter 24hr objective is exceeded can be obtained based on a relationship with the predicted particulate matter annual mean concentration. The most recent guidance LAQM.TG(16) suggests no change to this method. As such, the formula used within this assessment is:

$$\text{No. of Exceedances} = 0.0014 \times C^3 + \frac{206}{C} - 18.5$$

Where C is the annual mean concentration of PM<sub>10</sub>

#### Predicting the Number of Days in which the Nitrogen Dioxide Hourly Mean Objective is Exceeded

Research completed on behalf of Defra and the Devolved Administrations (Laxen and Marner, 2003, AEAT, 2008), have concluded that the hourly mean nitrogen dioxide objective is unlikely to be exceeded if annual mean concentrations are predicted to be less than 60µg/m<sup>3</sup>.

In 2003, Laxen and Marner concluded:

*"...local authorities could reliably base decisions on likely exceedances of the 1-hour objective for nitrogen dioxide alongside busy streets using an annual mean of 60µg/m<sup>3</sup> and above."*

The findings presented by Laxen and Marner (2003) are further supported by AEAT (2008) who revisited the investigation to complete an updated analysis including new monitoring results and additional monitoring sites. The recommendations of this report are:

*"Local authorities should continue to use the threshold of 60µg/m<sup>3</sup> NO<sub>2</sub> as the trigger for considering a likely exceedance of the hourly mean nitrogen dioxide objective."*

Therefore this assessment will evaluate the likelihood of exceeding the hourly mean nitrogen dioxide objective by comparing predicted annual mean nitrogen dioxide concentrations at all receptors to an annual mean equivalent threshold of 60µg/m<sup>3</sup> nitrogen dioxide. Where predicted concentrations are below this value, it can be concluded that the hourly mean nitrogen dioxide objective (200µg/m<sup>3</sup> NO<sub>2</sub> not to be exceeded more than 18 times per year) will be achieved.

The modelled and adjusted annual mean concentrations of NO<sub>2</sub>, PM<sub>10</sub> and PM<sub>2.5</sub>, and the number of exceedances of the 24-hour mean, 50µg/m<sup>3</sup> PM<sub>10</sub>, air quality objective at the selected receptors during the 2017 baseline scenario used for the traffic assessment are listed in Table 6A.10.



**Table 6A.10: Air Quality Statistics Predicted for Traffic Model Verification 2017**

ID	Receptor Name	Annual Mean Concentration			Number of Days of exceedance of 24-hour Mean PM <sub>10</sub> of 50µg/m <sup>3</sup> (days)
		NO <sub>2</sub> (µg/m <sup>3</sup> )	PM <sub>10</sub> (µg/m <sup>3</sup> )	PM <sub>2.5</sub> (µg/m <sup>3</sup> )	
R1	Hazel Dene	18.9	14.5	9.5	<1
R8	Humber Road, South Killingholme	23.1	15.4	10.0	<1
R13	The Poplars	21.7	15.1	9.8	<1
R14	Ulceby Road	24.4	15.5	10.1	<1
R15	Craven Lane	17.8	14.4	9.4	<1
R16	Town Street	27.7	16.3	10.6	<1
R17	Primitive Chapel Lane	24.8	15.7	10.2	<1
R18	Property north of Habrough	17.6	14.3	9.4	<1
R19	Property on Station Road in Habrough	17.7	14.4	9.4	<1

## Point Source Emissions

### *Dispersion Model Parameters*

The emissions inventory modelled for the assessment of impacts from the operational Proposed Development is detailed in Chapter 6: Air Quality and the additional model input parameters are provided in the sections below.

### *NO<sub>x</sub> to NO<sub>2</sub> Conversion – Combustion Plant*

Emissions of nitrogen oxides from industrial point sources are typically dominated by nitric oxide (NO), with emissions from combustion sources typically in the ratio of nitric oxide to nitrogen dioxide of 9:1. However, it is nitrogen dioxide that has specified NAQS objectives due to its potential impact on human health. In the ambient air, nitric oxide is oxidised to nitrogen dioxide by the ozone present, and the rate of oxidation is dependent on the relative concentrations of nitric oxide and ozone in the ambient air.

For the purposes of detailed modelling, and in accordance with Environment Agency technical guidance it is assumed that 70% of emitted nitric oxide is oxidised to nitrogen dioxide in the long term and 35% of the emitted nitric oxide is oxidised to nitrogen dioxide in the local vicinity of the site in the short-term.

### *Meteorological Data*


Actual measured hourly-sequential meteorological data is available for input into dispersion models, and it is important to select data as representative as possible for the site that is modelled. This is usually achieved by selecting a meteorological station as close to the site as possible, although other stations may be used if the local terrain and conditions vary considerably, or if the station does not provide sufficient data.




The meteorological site that was selected for the assessment is Humberside Airport, located approximately 9.5km southwest of the Proposed Development, at a flat airfield in a principally agricultural area, and therefore a surface roughness of 0.2m (representative of agricultural areas) has been selected for the meteorological site.

The modelling for this assessment has utilised 5 years of meteorological data for the period 2012 - 2016, and the worst case impacts from all years modelled has been used in the assessment. The sensitivity of the model results to the data from the five meteorological years is provided in the Sensitivity Analysis in this Appendix. The wind roses for Humberside for 2012 to 2016 are provided in Figure 6A.1.

**Figure 6A.1: Windrose for Humberside Airport 2012 - 2016**

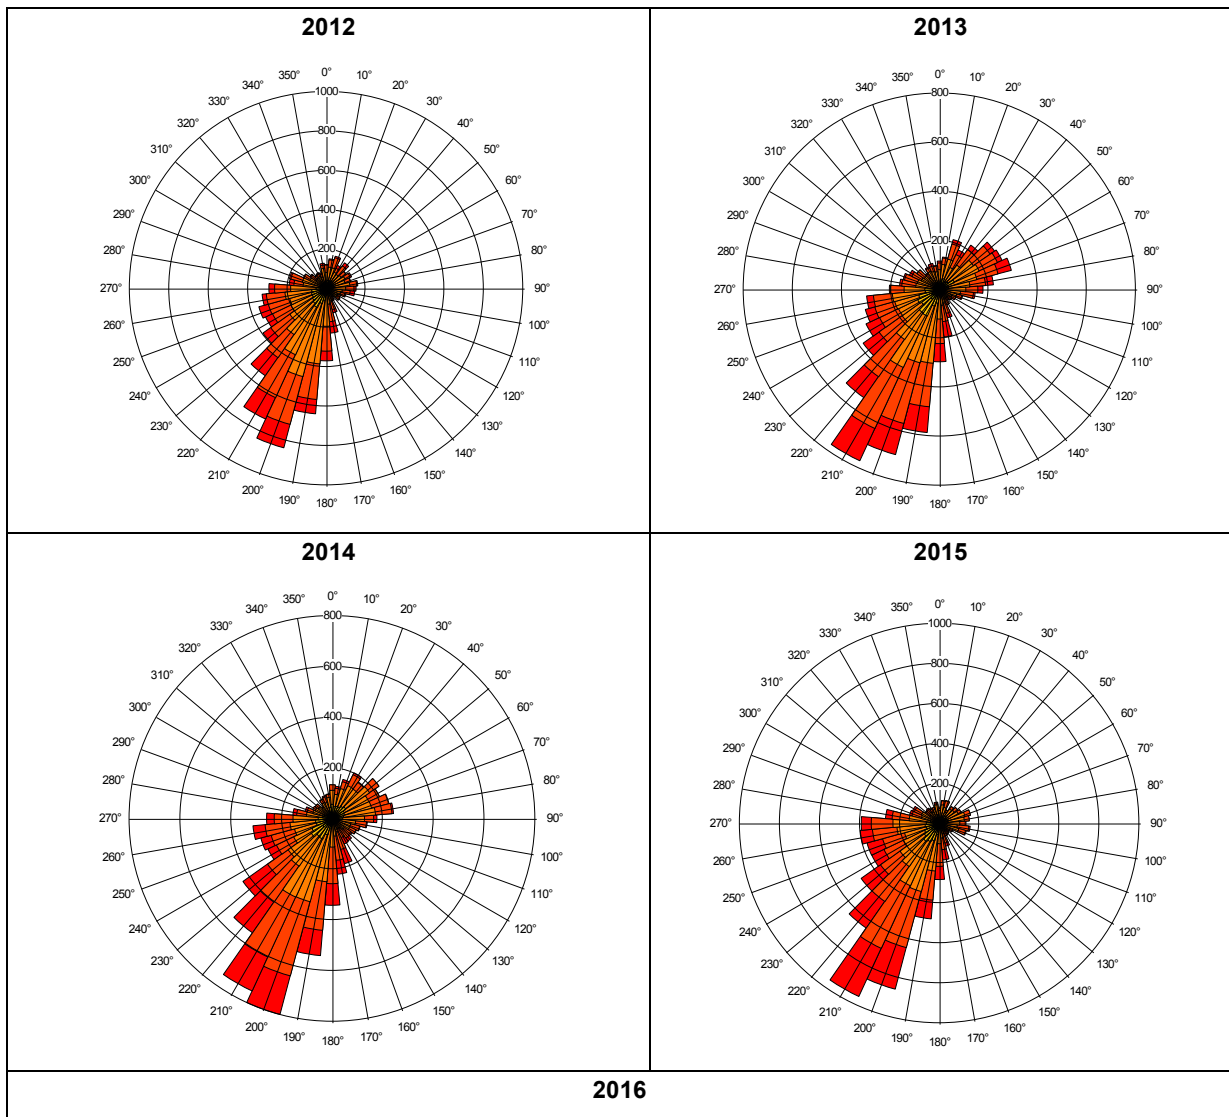

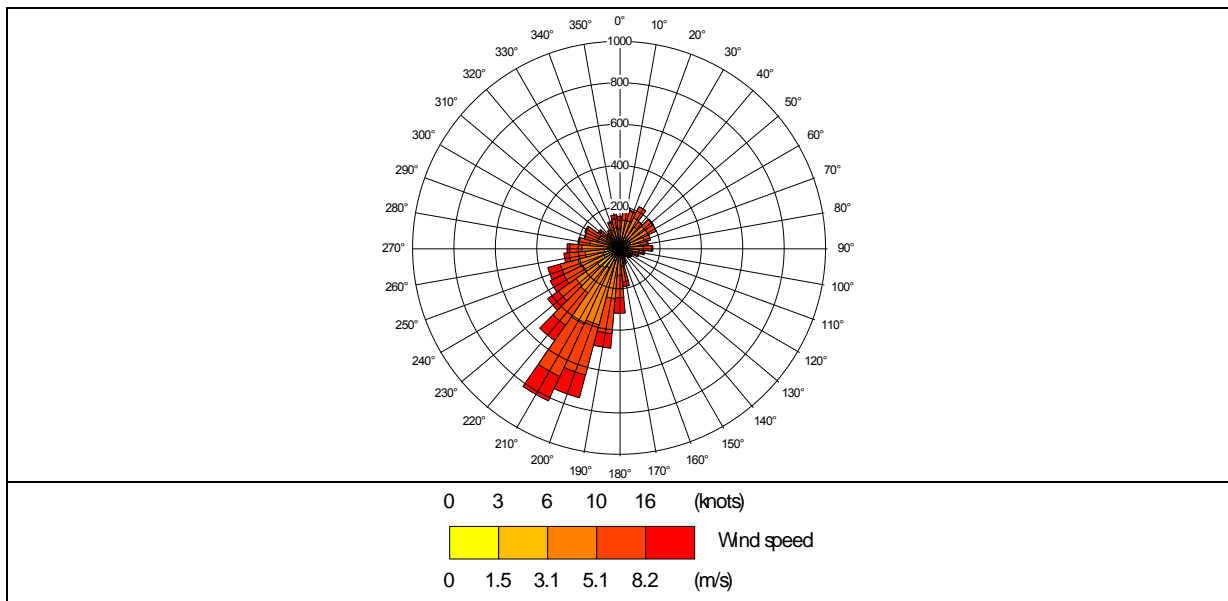

### Buildings and Terrain

The presence of buildings or structures near to the emission points can have a significant effect on the dispersion of emissions. The wind field can become entrained into the wake of buildings, which causes the wind to be directed to ground level more rapidly than in the absence of a building. If an emission is entrained into this deviated wind field, this can give rise to elevated ground-level concentrations. Building effects are typically considered where a structure of height greater than 40% of the stack height is situated within 8 - 10 stack heights of the emissions source.

Buildings associated with the Proposed Development that are considered to be of sufficient height and volume to potentially impact on the dispersion of emissions from the OCGT stack include the OCGT building and air intakes.

At this stage, the air quality assessment is conservatively based on the maximum (worst-case) building dimensions as outlined in Chapter 4: The Proposed Development. In reality, the building dimensions may be smaller than the ones used in the assessment, and this would be expected to reduce the significance of building impacts on the dispersion of emissions from the OCGT stack and therefore reduce the maximum predicted ground level concentrations; the results presented in Chapter 6: Air Quality are therefore considered to be conservative with respect to building effects. The sensitivity of the model results to the building dimensions is provided in the Sensitivity Analysis in this Appendix.


Parameters representing the buildings included in the model are shown in Table 6A.11 and a plan showing the worst-case buildings used in the ADMS simulations is illustrated in Figure 8A.2 below.

**Table 6A.11: Buildings Incorporated into the Modelling Assessment**

Building	Building Centre grid reference (x,y)	Height (m)	Length (m)	Width (m)	Angle (°)
CHP Building	516718,	22	130	35	60

Building	Building Centre grid reference (x,y)	Height (m)	Length (m)	Width (m)	Angle (°)
	417296				
OCGT Building	516653, 417408	23	25	46	60
Air Intake	516670, 417424	34	16	24	150

**Figure 6A.2: Building Visualisation**

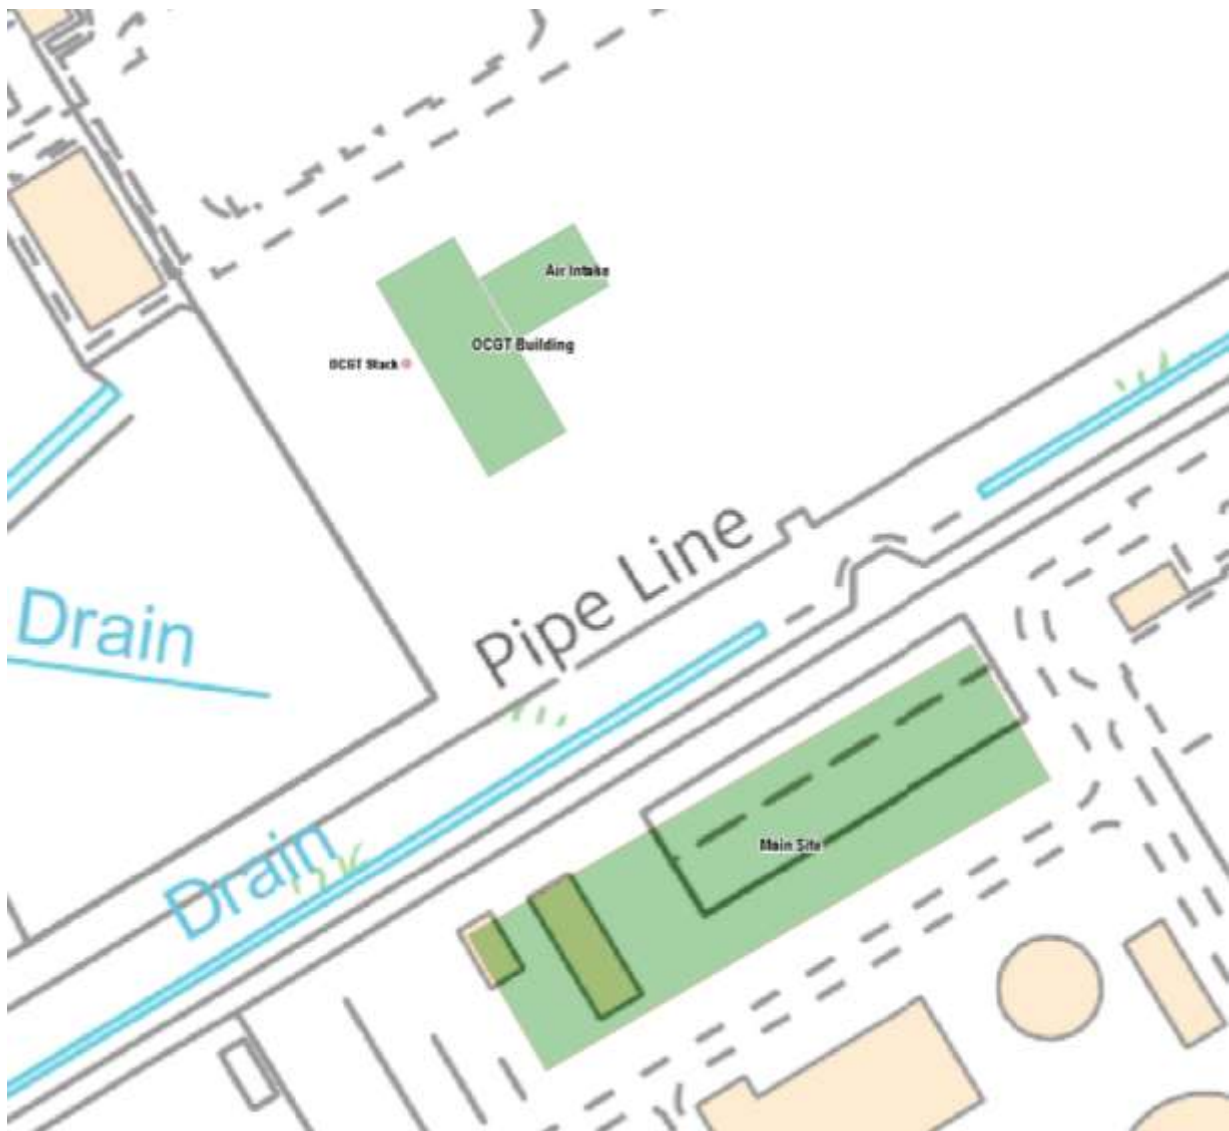

Ordnance Survey ©Crown Copyright 2018. All rights reserved. Licence number 100022432

The local area upwind and downwind of the Proposed Power Plant Site is flat, and predominantly industrial to the west, and agricultural to the north, south and east. A surface roughness of 0.5m, corresponding to Parkland and Open Suburbia, has therefore been selected to represent the local terrain.

Site-specific terrain data has not been used in the model, as typically terrain data will only have a marked effect on predicted concentrations where hills with gradient of more than 1 in 10 are present in the vicinity of the source, which is not the case at the Proposed Power Plant Site.

### *Other Surface Parameter*

The dispersion model can incorporate additional site-specific parameters relating to surface effects on dispersion of emissions. These include:

- Surface albedo – the ratio of reflected to incident shortwave solar radiation, in particular this is affected by ground snow cover;
- Minimum Monin-Obukhov length – this is a measure of atmospheric stability not represented by meteorological data and allows for urban heat-island effects, typically associated with large towns and cities; and
- Priestly-Taylor parameter – representing surface moisture that can evaporate.

The dispersion site (the Application Site) is considered to be similar to the meteorological site with respect to the above characteristics, and therefore the model has been run assuming that these site surface parameters are the same.

### *Modelled Domain and Receptors*

The main model results have been based on a grid extending 4km from the point source with a grid resolution output at 148m intervals from the source. The nearest sensitive receptor to the source is located approximately 350m from the source, therefore this resolution is considered appropriate. Discrete receptor locations, including residential properties and ecological receptors up to 15km from the Proposed Development, have also been included in the model, as detailed Chapter 6: Air Quality. These discrete receptors are not affected by the grid resolution selected in the model. Ecological receptor grid references have been determined through identification of the nearest receptor boundary to the Proposed Development. Modelled receptor locations are shown in Figure 6.1 (PEI Report Volume II).

### *Stack Height Determination*

The proposed stack heights for the OCGT has been optimised following screening modelling using conservative emission parameters, followed by detailed dispersion modelling and assessment to identify the appropriate stack height. A screening stack height range of 35 – 55m was selected based on typical OCGT plant stack heights and considering the height of the buildings associated with the OCGT plant. It can be seen from Table 6A.12 that the impacts at the worst case human health and ecological receptors at all stack heights are considered to be imperceptible.

At a stack height of 40m, the impacts increase slightly over those predicted for the 35m stack. It is considered that the 35m stack is results in lower impacts due to increased building downwash effects and therefore a 45m stack was considered to lead to better dispersion of the emission from the Proposed Development, and therefore has been selected as the appropriate stack height.

**Table 6A.12: Maximum Long Term PC at Worst Case Receptor at Assessed Stack Heights**

Main plant stack height	Annual mean NO <sub>2</sub> PC at HH receptor / NAQS	Magnitude of change	Effect	Annual mean NO <sub>x</sub> PC at Ecological receptor /CL	Magnitude of change	Effect
35m	0.23%	Imperceptible	Negligible	0.32%	Imperceptible	Negligible
40m	0.30%	Imperceptible	Negligible	0.34%	Imperceptible	Negligible
45m	0.18%	Imperceptible	Negligible	0.32%	Imperceptible	Negligible
50m	0.16%	Imperceptible	Negligible	0.29%	Imperceptible	Negligible
55m	0.14%	Imperceptible	Negligible	0.27%	Imperceptible	Negligible

The 45m stack height has been incorporated into the plant design and fixed for the purposes of the PEI Report air quality assessment. This has been referenced to Ordnance Datum (mAOD) such that a fixed emission release point of 45mOD has been used.

### Likely Impacts and Effects

The predicted impacts from the worst case scenario assessed and based on conservative assumptions as outlined in Chapter 6 are presented in Tables 6A.13 to 6A.17.

### Construction Traffic Emissions

**Table 6A.13: Long Term Nitrogen Dioxide Predicted Concentrations at Human Health Receptors for the Peak Construction Traffic Scenario**

Receptor ID	2021 baseline NO <sub>2</sub> (µg/m <sup>3</sup> ) <sup>2</sup>	Magnitude of change due to construction traffic (µg/m <sup>3</sup> )	2022 NO <sub>2</sub> with construction traffic <sup>3</sup> (µg/m <sup>3</sup> )	Annual mean NO <sub>2</sub> PEC <sup>4</sup> /NAQS	Effect
R1	18.6	<0.1	18.6	47%	Negligible
R8	20.7	<0.1	20.7	52%	Negligible
R13	19.7	<0.1	19.7	49%	Negligible
R14	21.5	<0.1	21.5	54%	Negligible
R15	17.2	<0.1	17.2	43%	Negligible
R16	23.7	<0.1	23.7	59%	Negligible
R17	21.8	<0.1	21.8	54%	Negligible
R18	17.2	<0.1	17.2	43%	Negligible
R19	17.2	<0.1	17.2	43%	Negligible

<sup>2</sup> 2022 Baseline is 2015 background + future emissions due to normal traffic growth for 2022

<sup>3</sup> 2022 with construction is 2015 background + emissions from Proposed Development construction traffic

<sup>4</sup> PEC= predicted environmental concentration (PC + background)

**Table 6A.14: Annual Mean NO<sub>x</sub> Predicted Concentrations at Ecological Receptors for the Peak Construction Traffic Scenario**

Receptor ID	Annual mean NOX baseline (µg/m <sup>3</sup> )	Annual mean NOX PC (µg/m <sup>3</sup> )	Annual mean PC/ Critical Level	Annual mean NOX PEC (µg/m <sup>3</sup> )	Annual mean PEC/ Critical Level	Effect
E1	30.0	<0.01	<0.1%	30.0	100%	Negligible adverse
E2	24.4	<0.01	<0.1%	24.4	81%	Negligible adverse
E3	19.9	<0.01	<0.1%	19.9	66%	Negligible adverse
E4	19.4	<0.01	<0.1%	19.4	65%	Negligible adverse
E5	18.8	<0.01	<0.1%	18.8	63%	Negligible adverse
E6	20.2	<0.01	<0.1%	20.2	67%	Negligible adverse
E7	21.9	<0.01	<0.1%	21.9	73%	Negligible adverse
E8	23.4	0.01	<0.1%	23.4	78%	Negligible adverse
E9	23.4	0.02	0.1%	23.4	78%	Negligible adverse
E10	28.1	0.10	0.3%	28.2	94%	Negligible adverse
E11	21.8	<0.01	<0.1%	21.8	73%	Negligible adverse
E12	22.3	<0.01	<0.1%	22.3	74%	Negligible adverse
E13	24.2	<0.01	<0.1%	24.2	81%	Negligible adverse
E14	21.9	0.01	<0.1%	21.9	73%	Negligible adverse

Long-term significance criteria: Insignificant / imperceptible < 1% of long-term Critical Level

### Operational Emissions

**Table 6A.15: Long Term Nitrogen Dioxide Predicted Concentrations at Human Health Receptors for the 2024 Operational Scenario**

Receptor I.D.	Annual Average PC (µg/m <sup>3</sup> )	PC/NAQs	Magnitude of Change	Annual Average AC (µg/m <sup>3</sup> )	PEC/NAQS	Effect Descriptor
R1	0.03	0.1%	Imperceptible	17.0	43%	Negligible
R2	0.01	<0.1%	Imperceptible		43%	Negligible
R3	0.1	0.3%	Imperceptible		43%	Negligible



Receptor I.D.	Annual Average PC ( $\mu\text{g}/\text{m}^3$ )	PC/NAQs	Magnitude of Change	Annual Average AC ( $\mu\text{g}/\text{m}^3$ )	PEC/NAQS	Effect Descriptor
R4	0.005	<0.1%	Imperceptible		43%	Negligible
R5	0.009	<0.1%	Imperceptible		43%	Negligible
R6	0.02	0.1%	Imperceptible		43%	Negligible
R7	0.02	<0.1%	Imperceptible		43%	Negligible
R8	0.02	<0.1%	Imperceptible		43%	Negligible
R9	0.01	<0.1%	Imperceptible		43%	Negligible
R10	0.005	<0.1%	Imperceptible		43%	Negligible
R11	0.06	0.2%	Imperceptible		43%	Negligible
R12	0.004	<0.1%	Imperceptible		43%	Negligible

**Table 6A.16: Short Term Nitrogen Dioxide Predicted Concentrations at Human Health Receptors for the Operational Scenario**

Receptor ID	Hourly NO <sub>2</sub> PC ( $\mu\text{g}/\text{m}^3$ )	PC/AQS	Magnitude of Change	NO <sub>2</sub> baseline ( $\mu\text{g}/\text{m}^3$ )	PEC/AQS	Effect Descriptor
R1	3.6	2%	Imperceptible	34.0	19%	Negligible
R2	2.1	1%	Imperceptible		18%	Negligible
R3	4.4	2%	Imperceptible		19%	Negligible
R4	1.0	<1%	Imperceptible		17%	Negligible
R5	1.8	1%	Imperceptible		18%	Negligible
R6	2.2	1%	Imperceptible		18%	Negligible
R7	2.1	1%	Imperceptible		18%	Negligible
R8	2.1	1%	Imperceptible		18%	Negligible
R9	2.0	1%	Imperceptible		18%	Negligible
R10	1.1	1%	Imperceptible		18%	Negligible
R11	3.2	2%	Imperceptible		19%	Negligible
R12	0.7	1%	Imperceptible		17%	Negligible

Short-term baseline assumed to be twice the annual average baseline; EA short-term significance criteria: not <10% of short-term Critical Level

**Table 6A.17: Maximum Daily Mean NO<sub>x</sub> Predicted Concentrations at Ecological Receptors**

Receptor ID	NO <sub>x</sub> short-term baseline ( $\mu\text{g}/\text{m}^3$ )	Daily mean NO <sub>x</sub> PC ( $\mu\text{g}/\text{m}^3$ )	Daily mean PC/ Critical Level	Daily mean NO <sub>x</sub> PEC ( $\mu\text{g}/\text{m}^3$ )	Daily mean PEC/ Critical Level	Effect



Receptor ID	NO <sub>x</sub> short-term baseline (µg/m <sup>3</sup> )	Daily mean NO <sub>x</sub> PC (µg/m <sup>3</sup> )	Daily mean PC/ Critical Level	Daily mean NO <sub>x</sub> PEC (µg/m <sup>3</sup> )	Daily mean PEC/ Critical Level	Effect
E1	44.9	7.4	10%	52.3	70%	Negligible
E2	36.6	3.7	5%	40.3	54%	Negligible
E3	29.8	1.0	1%	30.8	41%	Negligible
E4	29.0	0.6	1%	29.6	39%	Negligible
E5	28.1	0.4	1%	28.6	38%	Negligible
E6	30.3	0.5	1%	30.8	41%	Negligible
E7	32.8	6.3	8%	39.0	52%	Negligible
E8	35.1	3.7	5%	38.8	52%	Negligible
E9	35.1	8.2	11%	43.3	58%	Minor Adverse
E10	42.2	3.1	4%	45.3	60%	Negligible
E11	32.8	3.1	4%	35.8	48%	Negligible
E12	33.4	4.1	6%	37.5	50%	Negligible
E13	36.3	1.2	2%	37.6	50%	Negligible
E14	32.8	6.9	9%	39.7	53%	Negligible

Short-term baseline assumed to be one and a half times the annual average baseline; EA short-term significance criteria: not <10% of short-term Critical Level

**Table 6A.18: Maximum Annual Mean NO<sub>x</sub> Predicted Concentrations at Ecological Receptors**

Receptor ID	Annual mean NO <sub>x</sub> baseline (µg/m <sup>3</sup> )	Annual mean NO <sub>x</sub> PC (µg/m <sup>3</sup> )	Annual mean PC/ Critical Level	Annual mean NO <sub>x</sub> PEC (µg/m <sup>3</sup> )	Annual mean PEC/ Critical Level	Effect
E1	30.0	0.14	0.5%	30.0	100%	Negligible adverse
E2	24.4	0.06	0.2%	24.4	82%	Negligible adverse
E3	19.9	0.01	<0.1%	19.9	66%	Negligible adverse
E4	19.4	0.02	0.1%	19.4	65%	Negligible adverse
E5	18.8	0.005	<0.1%	18.8	63%	Negligible adverse
E6	20.2	0.009	<0.1%	20.2	67%	Negligible adverse
E7	21.9	0.04	0.1%	21.9	73%	Negligible adverse

Receptor ID	Annual mean NO <sub>x</sub> baseline (µg/m <sup>3</sup> )	Annual mean NO <sub>x</sub> PC (µg/m <sup>3</sup> )	Annual mean PC/ Critical Level	Annual mean NO <sub>x</sub> PEC (µg/m <sup>3</sup> )	Annual mean PEC/ Critical Level	Effect
E8	23.4	0.03	0.1%	23.4	78%	Negligible adverse
E9	23.4	0.06	0.2%	23.5	78%	Negligible adverse
E10	28.1	0.01	<0.1%	28.1	94%	Negligible adverse
E11	21.8	0.02	0.1%	21.9	73%	Negligible adverse
E12	22.3	0.02	<0.1%	22.3	74%	Negligible adverse
E13	24.2	0.006	<0.1%	24.2	81%	Negligible adverse
E14	21.9	0.04	0.1%	21.9	73%	Negligible adverse

Long-term significance criteria: Insignificant / imperceptible < 1% of long-term Critical Level

**Table 6A.19: Maximum Predicted Nutrient Nitrogen Deposition to Land at Ecological Receptors**

<b>ID</b>	<b>Critical Load Class</b>	<b>Critical Load Range (kg N/ha/hr)</b>	<b>Baseline (kgN/ha/yr) [as % lower Critical Load]</b>	<b>Annual mean PC (kgN/ha/yr)</b>	<b>PC / Critical Load (lower)</b>	<b>Effect</b>
E1 Humber Estuary SPA, SAC and SSSI	<i>Rich Fens</i>	15 - 30	100%	0.0003	<0.1%	Insignificant
	<i>Low and medium altitude hay meadows</i>	20 - 30	75%	0.01	<0.1%	Insignificant
	<i>Pioneer, low-mid, mid-upper saltmarshes</i>	20 – 30	75%	0.01	<0.1%	Insignificant
	<i>Coastal stable dune grassland - acid type</i>	8 - 10	188%	0.0003	<0.1%	Insignificant
	<i>Coastal stable dune grassland - calcareous type</i>	10 – 15	150%	0.0003	<0.1%	Insignificant
	<i>Coastal shifting dunes</i>	10 - 20	150%	0.0003	<0.1%	Insignificant
	<i>Northern wet heath</i>	10 - 20	150%	0.0003	<0.1%	Insignificant
E2 North Killingholme Haven Pits SSSI	<i>Pioneer, low-mid, mid-upper saltmarshes</i>	20 - 30	81%	0.006	<0.1%	Insignificant
E3 Kirmington Pits SSSI	No information listed within APIS					
E4 Kelsey Hill Gravel Pits SSSI	No features listed within APIS					
E5 Swallow	<i>Calcareous grassland</i>	15 - 25	125%	0.0005	<0.1%	Insignificant

ID	Critical Load Class	Critical Load Range (kg N/ha/hr)	Baseline (kgN/ha/yr) [as % lower Critical Load]	Annual mean PC (kgN/ha/yr)	PC / Critical Load (lower)	Effect
Wold SSSI						
E6 Wrawby Wold SSSI	<i>Acid grassland</i>	10 - 15	253%	0.0010	<0.1%	Insignificant
	<i>Broadleaved and mixed yew woodland</i>	15 - 20	283%	0.002	<0.1%	Insignificant

Notes:

PC/Critical Load <1% is described as insignificant or 'imperceptible'

1 = Critical Loads and existing baseline levels taken from APIS

2 = "Rich Fens" and "Northern Wet Heath" habitat are not considered to occur in the vicinity of the Proposed Development Site. The annual PC has therefore been assessed at a location to the west of the Humber Bridge, which is considered to be the closest location where such habitat could occur.

3 = There are not considered to be any "Dune" type habitats within the vicinity of the Proposed Development Site. The annual PC has therefore been assessed at known dune locations, namely south of Cleethorpes and at Spurn Point.

**Table 6A.20: Maximum Predicted Acid Deposition to Land at Ecological Receptors**

ID	Receptor name (Critical Load Class: most sensitive species)	Critical Load (keqN/ha/yr)	Critical Load (keqS/ha/yr)	Total Background (N:S keq/ha/yr)	Process contribution of N to Acid Deposition <sup>56</sup>	PC/ Critical Load (CLMaxN)	PEC/ Critical Load (CLMaxN)	Effect
E1 Humber Estuary SPA, SAC and SSSI	<i>Acid Grassland</i>	0.223 – 0.643	0.420	1.07:0.32	0.0006	<0.1%	216%	Insignificant
	<i>Calcareous grassland</i>	0.856 – 4.856	4.000	1.07:0.32	0.0006	<0.1%	29%	Insignificant
	<i>Dwarf Shrub and Heath</i>	0.499 – 1.312	0.420	1.07:0.32	0.00002	<0.1%	106%	Insignificant
E2 North	Not sensitive to acid deposition							

<sup>5</sup> PC/Critical Load <1% is described as insignificant or 'imperceptible'

<sup>6</sup> Sulphur contribution from Proposed Development assumed to be zero.

ID	Receptor name (Critical Load Class: most sensitive species)	Critical Load (keqN/ha/yr)	Critical Load (keqS/ha/yr)	Total Background (N:S keq/ha/yr)	Process contribution of N to Acid Deposition <sup>56</sup>	PC/ Critical Load (CLMaxN)	PEC/ Critical Load (CLMaxN)	Effect
Killingholme Haven Pits SSSI	No information listed within APIS							
E3 Kirmington Pits SSSI								
E4 Kelsey Hill Gravel Pits SSSI								
E5 Swallow Wold SSSI	<i>Calcareous grassland</i>	0.856 – 4.856	4.000	1.34:0.27	0.00003	<0.1%	33%	Insignificant
E6 Wrawby Wold SSSI	<i>Acid grassland</i>	0.366 – 0.536	0.170	1.81:0.31	0.00005	<0.1%	396%	Insignificant
	<i>Broadleaved and mixed yew woodland</i>	0.285 – 1.333	0.748	3.04:0.35	0.00009	<0.1%	254%	Insignificant

